INSTALLATION INSTRUCTIONS


ba14403e06 01/2016

BE/R 170-D


SWIVEL/PIVOT CLAMP FIXTURE

WTW
a xylem brand


Assembly

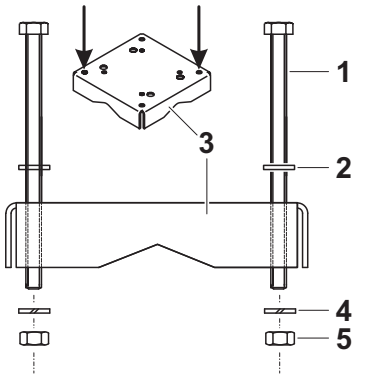


For easy assembly mount two hexagon head bolts (**1**) with lock washers (**2)** and (**4**) and nuts (**5**) to one clamping device (**3**).

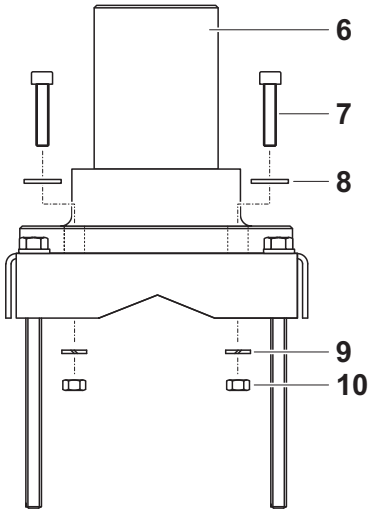

Mount the pivot bracket (**6**) to the clamping device using four hexagon socket head cap screws (**7**), washers (**8**), lock washers (**9**) and nuts (**10**).

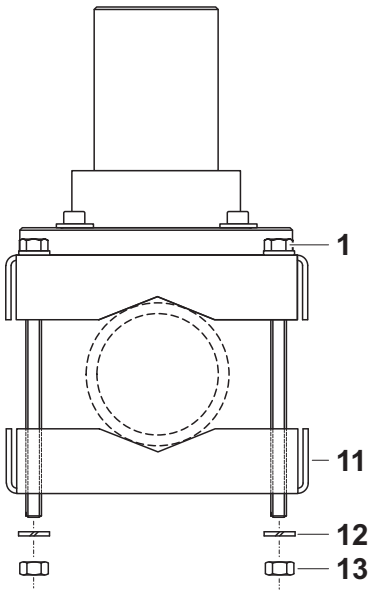

Mount the unit to the railng using the other two hexagon head bolts (**1**), the four lock washers (**12**) and nuts (**13**) and the second clamping device.

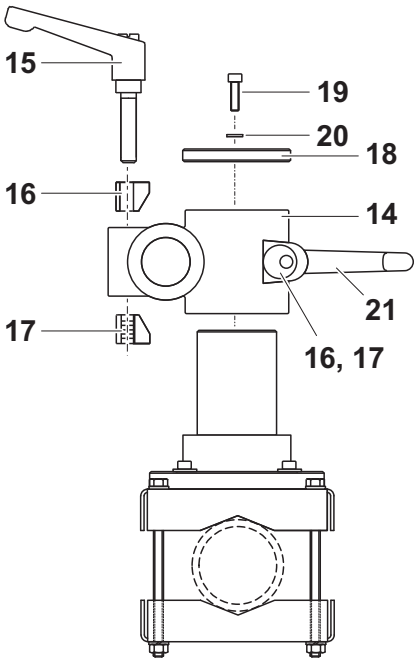


Attach the double junction clamp to the pivot bracket and secure it with the retaining disk (**18**), hexagon socket head cap screw (**19**) and washer (**20**).

Note on funktion:
Open the clamping lever only up to the point where the outtrigger can be moved. If the clamping lever is unscrewed completely the wedges can get lost!

Parts list

To adjust the orientation of the lever, pull the lever, then turn and release

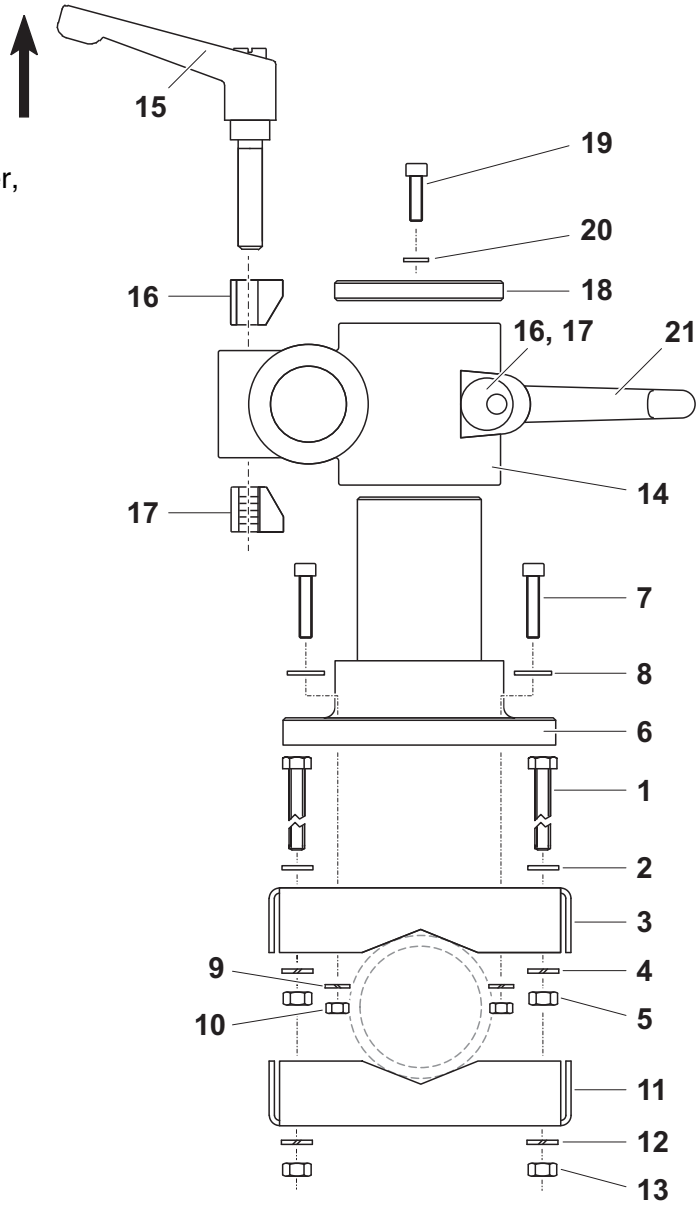

Pos.	Designation	Quantity
1	Hexagon head bolt M6 x 110	4
2	Lock washer A6.4	4
3, 11	Clamping device	2
4, 12	Lock washer B6	6
5, 13	Nut M6	6
6	Pivot bracket	1
7	Hex. socket head cap screw M5 x 25	4
8	Washer A5.3 (large)	4
9	Lock washer B5	4
10	Nut M5	4
14	Double junction clamp body	1
15	Clamping lever M8 x 40	2
16	Bushing	2
17	Nut M10	1
18	Retaining disk	1
19	Hex. socket head cap screw M5 x 18	1
20	Washer A5.3 (small)	1
21	Clamping lever M8 x 50	1

Technical Data

Materials

Pos.	Material
14	Cast aluminum
15, 21	Plastic-coated zinc die cast, with stainless steel screw 1.4305 (V2A)
1-5, 7-13, 19	Stainless steel 1.4301
16, 17	Stainless steel 1.4301
6, 18	POM

Xylem |ˈzīləm|

1) The tissue in plants that brings water upward from the roots;
2) a leading global water technology company.

We're 12,500 people unified in a common purpose: creating innovative solutions to meet our world's water needs. Developing new technologies that will improve the way water is used, conserved, and re-used in the future is central to our work. We move, treat, analyze, and return water to the environment, and we help people use water efficiently, in their homes, buildings, factories and farms. In more than 150 countries, we have strong, long-standing relationships with customers who know us for our powerful combination of leading product brands and applications expertise, backed by a legacy of innovation.

For more information on how Xylem can help you, go to www.xyleminc.com

WTW
a xylem brand

Wissenschaftlich-Technische Werkstätten GmbH

Dr.-Karl-Slevogt-Straße 1
D-82362 Weilheim
Germany

Tel: +49 881 183-0
Fax: +49 881 183-420
E-Mail: info@wtw.com
Internet: www.wtw.com